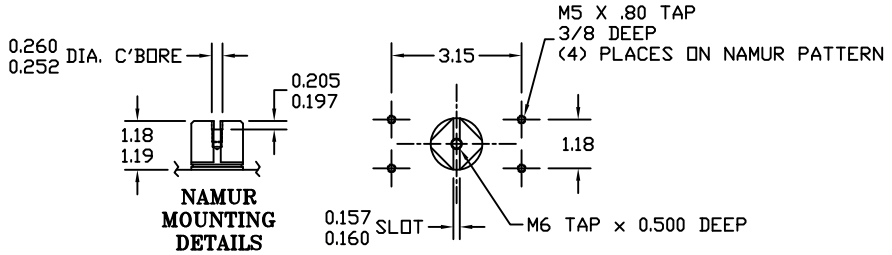

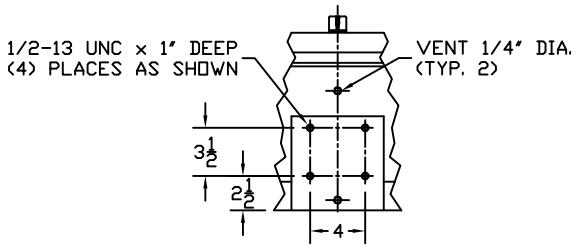

ACCESSORY PAD DETAIL
REAR VIEW

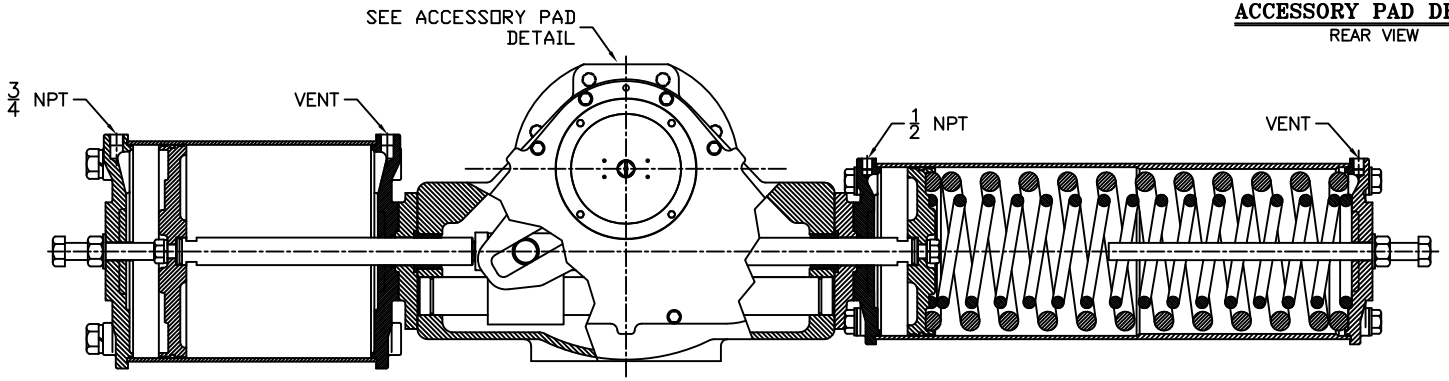

SECTION C–C

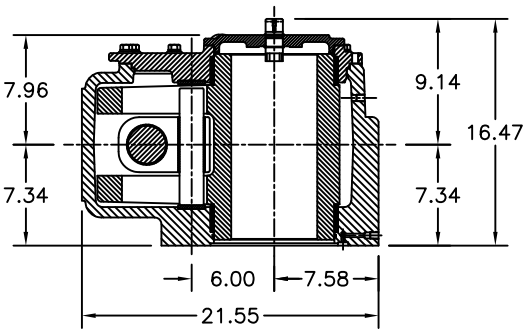

SECTION A–A
YOKE SHOWN AT MID-STROKE
ACCESSORIES OMITTED FOR CLARITY

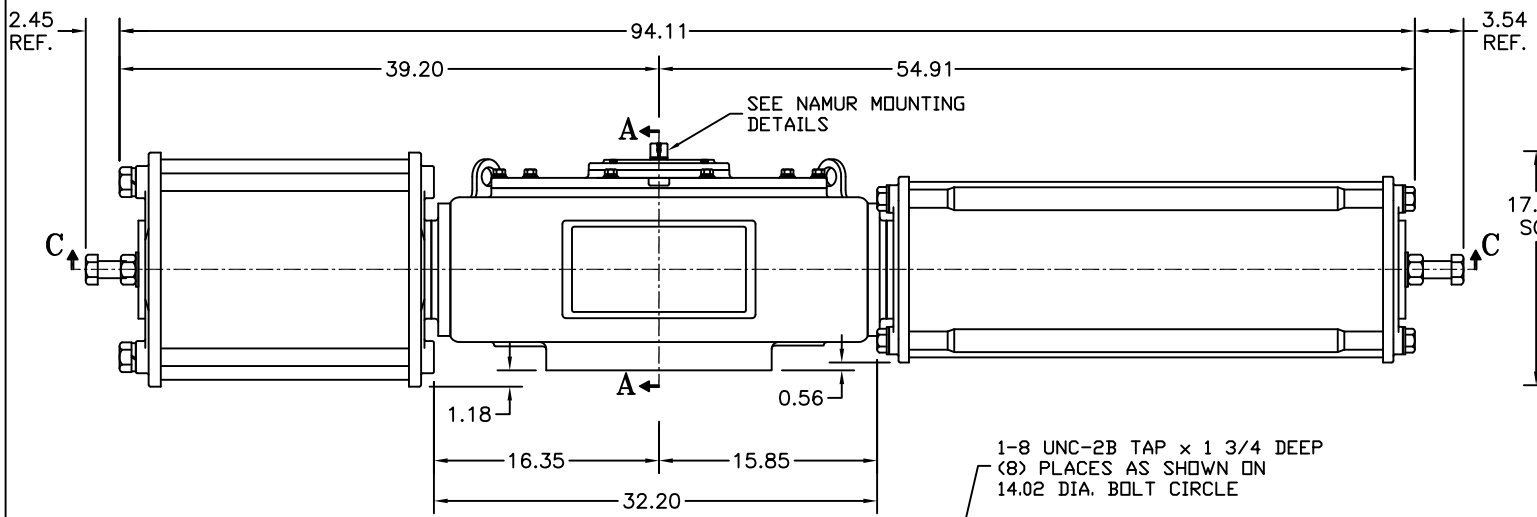

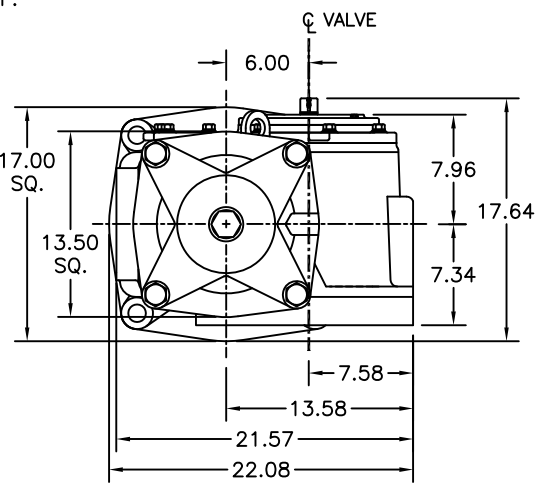

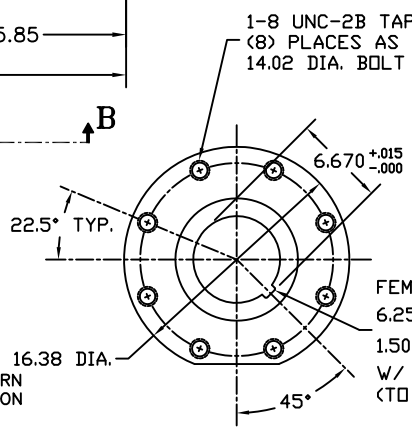

VIEW B–B
ISO F35 MOUNTING PATTERN
SHOWN IN CLOSED POSITION

FEMALE DRIVE
6.250 +.005 -.000 DIA. BORE x 12.50 DEEP
1.501 +.004 -.000 RECTANGULAR KEYWAY
W/ 0.12 RADIUS INSIDE KEYWAY CORNERS
(TO BE USED W/ 1 1/2" x 1" KEY)

REV	CHANGE	BY	CHK	APR	DATE
D	UPDATED ADJUSTMENT SCREW SIZE AND LENGTH	CAW			03/07/11
C	CORRECTED ACCES. PAD DETAIL: 1/4" VENT WAS 3/4" VENT	CAW			08/23/10
B	UPDATED VIEW B–B	CAW			08/26/09

MORIN®
Birmingham, AL

TITLE: MODEL C-1934UC-S000 ACTUATOR

DRAWN BY:	DATE:	CHECKER:	DATE:	APPROVAL:	DATE:
CAW	06/25/08				

SCALE:	REVISION:	DRAWING NO.:
1 : 3.5	D	S60B077D
SHEET 1 OF 1	DWG. SIZE: E	